



INTERNAL  
DOWN LIGHTS



□ SINGLE - SQUARE DOWNLIGHT  
QR-111 LAMP  
**LLUE-DM-0081-14-00 White**  
**LLUE-DM-0081-60-00 Black**  
.QR-111 G53 12V MAX 100W  
156X156MM CUT OUT



□ DOUBLE - RECTANGULAR DOWNLIGHT  
2XQR-111 LAMPS.  
**LLUE-DM-0082-14-00 White**  
**LLUE-DM-0082-60-00 Black**  
QR-111 G53 12V MAX. 2X100W  
300X156MM CUT OUT



□ TRIPLE - RECTANGULAR DOWNLIGHT  
3XQR-111 LAMPS  
**LLUE-DM-0083-14-00 White**  
**LLUE-DM-0083-60-00 Black.**  
QR-111 G53 12V MAX. 3X100W  
444X156MM CUT OUT



□ QUAD - SQUARE DOWNLIGHT  
4XQR-111 LAMPS.  
**LLUE-DM-0084-14-00 White**  
**LLUE-DM-0084-60-00 Black**  
QR-111 G53 12V MAX. 4X100W  
311X311MM CUT OUT

GEAR NOT INCLUDED TO BE ORDERED SEPARATELY,

CE F III IP 20

RF850°C 0,5m

multidir

trimless



□ SINGLE - SQUARE DOWNLIGHT  
QR-CB51 LAMP  
**LLUE-DM-0093-14-00**  
**LLUE-DM-0093-60-00**  
QR-CB51 GU5.3 12V MAX.50W  
108X108MM CUT OUT



□ DOUBLE - RECTANGULAR DOWNLIGHT  
2XQR-CB51 LAMPS  
**LLUE-DM-0094-14-00**  
**LLUE-DM-0094-60-00**  
QR-CB51 GU5.3 12V MAX. 2X50W  
206X108MM CUT OUT






□ TRIPLE - RECTANGULAR DOWNLIGHT  
3XQR-CB51 LAMPS  
**LLUE-DM-0095-14-00**  
**LLUE-DM-0095-60-00**  
QR-CB51 GU5.3 12V MAX. 3X50W  
304X108MM CUT OUT



□ QUAD - SQUARE DOWNLIGHT  
4XQR-CB51 LAMPS  
**LLUE-DM-0096-14-00**  
**LLUE-DM-0096-60-00**  
QR-CB51 GU5.3 12V MAX. 4X50W  
214X214MM CUT OUT

GEAR NOT INCLUDED TO BE ORDERED  
SEPARATELY,

   IP 20


 

multidir

trimless



Decorative suspended luminaire

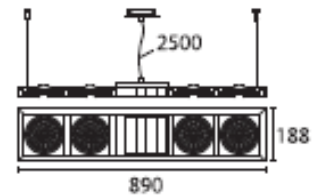

**LLUE-AR-SP-0105-N3-00**  
FOR QR-111 G53 LAMP  
230V 4X65W MAX  
GREY

CE F III IP 20

RF850°C 0,5m

multidir

suspended





□ SINGLE - SQUARE DOWNLIGHT  
QR-CB51 LAMP  
**LLUE-DM-0053-N3-00 Grey**  
**LLUE-DM-0053-14-00 White**  
QR-CB51 GU5.3 12V MAX.50W  
110X110MM CUTOUT



□ DOUBLE - RECTANGULAR DOWNLIGHT  
2X QR-CB51 LAMPS  
**LLUE-DM-0054-N3-00 Grey**  
**LLUE-DM-0054-14-00 White**  
QR-CB51 GU5.3 12V MAX. 2X50W  
208X110MM CUTOUT



□ TRIPLE - RECTANGULAR DOWNLIGHT  
3X QR-CB51 LAMPS  
**LLUE-DM-0055-N3-00 Grey**  
**LLUE-DM-0055-14-00 White**  
QR-CB51 GU5.3 12V MAX. 3X50W  
306X110MM CUTOUT



□ QUAD - SQUARE DOWNLIGHT  
4X QR-CB51 LAMPS.  
**LLUE-DM-0056-N3-00 Grey**  
**LLUE-DM-0056-14-00 White**  
QR-CB51 GU5.3 12V MAX.  
4X50W  
215X215MM CUT OUT

Housing made of black lacquered steel. Outer trim in die-cast aluminium finished in grey-silver epoxy painting. Cardan type orientation system for total freedom to adjust the light direction.

Available for halogen lamps ( QR-111, QR-CB51). Brackets integrated in the luminaire housing and adjust

GEAR NOT INCLUDED TO BE ORDERED SEPARATELY

CE F III IP 20

RF850°C 0,5m

multidir

trimmed




Die-cast professional baffle minimizes aperture glare; sealed collar prevents light leak. Thickness measure 1.4mm. Torsion spring clips accommodate varying ceiling thickness and ensure snug fit of fitting against ceiling. Frosted glass lens included.


Steel, aluminium and thermoplastic, painted finished are granulated podvercoat.

MR16 style lamp options: 12v HAL 50W max, ceramic metal HID 35w max, CCFL, LED  
IP10 rated


Colours: Matte White, Matte Black, Polished Chrome, Industrial Grey, Brushed Stainless Steel

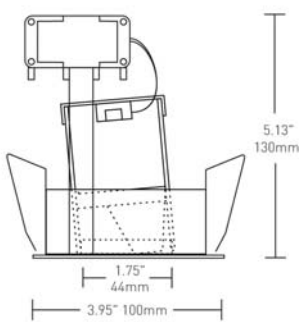

**LLLS-EDL5ZP**  
ROUND WALLWASH MIRAGE  
RECESSED DOWNLIGHT

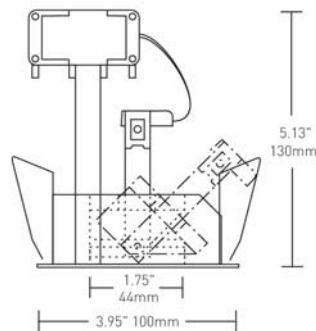

**LLLS-EDL2RZP**  
ROUND ADJUSTABLE  
RECESSED DOWNLIGHT

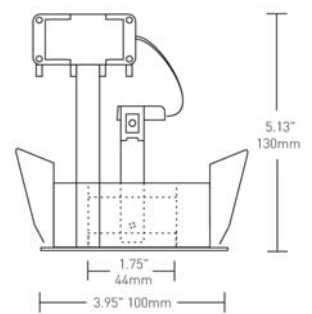

**LLLS-EDL1ZP**  
ROUND FIXED RECESSED  
DOWNLIGHT

# lucifer

Small recessed luminaires for QR-CB51.

Housing made of black lacquered steel.

Outer trim in die-cast aluminium finished in grey-silver epoxy painting.

Inox lamp fixation spring with great resistance to deformations.

Brackets integrated in the housing and adjustable without tools



# mini



□ SINGLE - SQUARE DOWNLIGHT  
QR-CB51 LAMP  
**LLUE-DM-0048-N3-00 Grey**  
QR-CB51 GU5.3 12V MAX. 50W  
83X70MM CUT OUT



□ DOUBLE - RECTANGULAR DOWNLIGHT  
QR-CB51 LAMP WITH ASYMMETRIC  
POSITION  
**LLUE-DM-0049-N3-00 Grey**  
QR-CB51 GU5.3 12V MAX. 50W  
173X70MM CUT OUT









□ DOUBLE - RECTANGULAR DOWNLIGHT  
2X QR-CB51 LAMP  
**LLUE-DM-0050-N3-00 Grey**  
QR-CB51 GU5.3 12V MAX. 2X50W  
173X70MM CUT OUT



□ TRIPLE - RECTANGULAR DOWNLIGHT  
3X QR-CB51 LAMP  
**LLUE-DM-0051-N3-00 Grey**  
QR-CB51 GU5.3 12V MAX. 3X50W  
236X70MM CUT OUT

GEAR NOT INCLUDED TO BE ORDERED  
SEPARATELY,

   IP 20


  

mini





Designed to achieve a perfect integration with the environment, a new range of recessed multifunction fittings is born under the name of Camaleon.

The matt white version has been developed to match chromatically with the mounting surface. Its external housing can be coloured with the same paint used on walls or ceilings matching perfectly with different atmospheres.





RECESSED ASYMMETRIC LUMINAIRE FOR GENERAL LIGHTING.  
**LLUE-DN-1303-14-00 White**  
**LLUE-DN-1303-J2-00 Anodized Silver**  
 QR-CBC51 GU5.3 12v max. 50W 01-08  
 Ø80mm cut out  
 GEAR NOT INCLUDED, TO BE ORDERED SEPARATELY,

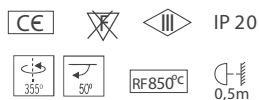

RECESSED ASYMMETRIC LUMINAIRE FOR AMBIENT AND/OR ACCENT LIGHTING  
**LLUE-DN-1302-14-00 White**  
**LLUE-DN-1302-J2-00 Anodized Silver**  
 QR-111 G53 12V MAX. 100W  
 Ø200MM CUT OUT  
 GEAR NOT INCLUDED TO BE ORDERED SEPARATELY






camaleon

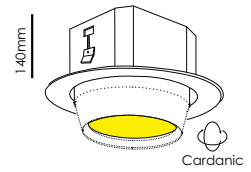

SINGLE COLLECTOR SNOOT RECESSED  
BLACK & WHITE MATT TEXTURE  
TRANSFORMER/BALLAST NOT INCLUDED

LLS-DOX-414.51.05-s 1 x LED  
LLS-DOX-414.14.05-s 1 x CDM-R-111  
LLS-DOX-414.13.05-s 1 x CDM-Tc 30°  
LLS-DOX-414.07.05-s 1 x QR111

G53 QR111 MAX 50W 12V IP20  
G8.5 CDM-Tc / 35-70W / 230V  
GX8.5 CDM-R-111 / 35-70W

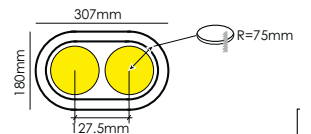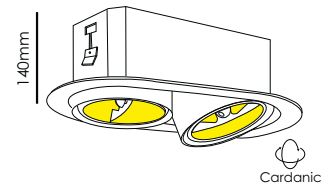

DOUBLE COLLECTOR RECESSED  
BLACK & WHITE MATT TEXTURE  
TRANSFORMER/BALLAST NOT INCLUDED

LLS-DOX-415.40.05 (1 x QR) + (1 x CDM-R)  
LLS-DOX-415.51.05 2 x LED  
LLS-DOX-415.14.05 2 x CDM-R-111  
LLS-DOX-415.07.06 2 x QR111


G53 QR111 MAX 50W 12V IP20



collector

SAVE  
70%  
Energy!

The Powerlux LED downlight is a high quality LED fitting to replace standard halogen MR16 downlight comprising of 7 high powered osram LED's. Powerlux is a true replacement to halogen MR16 lamps offering better light output and 70% energy efficiency. Powerlux downlights are dimmable with 700mA LED dimming components.

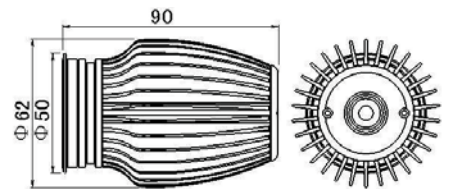

LLLED-PLX30-4k 30 degrees Neutral White  
LLLED-PLX60-4k 60 degrees Neutral White  
LLLED-PLX30-4k 30 degrees Warm White  
LLLED-PLX60-4k 60 degrees Warm White

Ø62MM X 90MM (L) OUTLINE DIMENSION  
4000 K / 3000 K COLOUR TEMP  
30/60 DEGREE BEAM ANGLE  
700MA INPUT CURRENT  
15W MAX POWER CONSUMPTION  
260G NET WEIGHT  
-20°C~95°C OPERATION TEMP  
GIMBALED HOUSING  
SILVER 70MM / WHITE 90MM CUTOUT

powerlux

led



All lighting fixtures bearing this symbol are suitable for installation on normally inflammable surfaces.



All lighting fixtures bearing this symbol are unsuitable for installation on normally inflammable surfaces.



All light fittings bearing this symbol are Class I models. These light fittings have only basic isolation and therefore must be connected to the earthing system of the residential dwelling.



All lighting fixtures bearing this symbol are of Class II. No metal part of Class II fixtures shall be connected to the ground connection of the home installation.



This symbol indicates the minimum distance to be left between the focus of the lighting fixture and the lighted object.



Resistance to incandescent wire at 850°C.



Registered models.



Check availability.



Energy saving.



IP 44 All light fittings bearing this symbol are protected against water projections.



Dust-tight lamp, protected against water jets.




Lamp protected against ingress of solid objects greater than 12mm.



Dust-tight lamp and protected against the effects of prolonged immersion in water and at depth.



Lamp protected against ingress of dust and against splashing water.



Halo light direction.



Aluminum



Manufactured according to the set safety and electromagnetism standards of Europe



Steel



PVC



Ballast included



Ballast needed, but not included.



Fabric



Optic glass



Transformer included.



Transformer needed, but not included.



Zamak



Electronic ballast included.



PMMA



Protection against electrical shocks includes other measures based on a very low voltage through a security transformer, without generating higher voltages



Class 1.



Adjustable from 0° to 50° on the horizontal axis.



Adjustable +180°/-15° on the horizontal axis.



Adjustable from 0° to 350° on the vertical axis.



Adjustable +/- 20° on the horizontal axis.

- » All products supplied by Limelight are sourced from third parties.
- » Limelight Illumination refers to their general terms of trade on all orders.
- » The description and dimensions of the items in this catalogue are indicative and may be modified for the purpose of technical or design improvements by the manufacturer.
- » The manufacturer of the listed products reserves the right to cancel or change all models without prior notice.
- » Do not use stronger bulbs than recommended and always clean lamps with a soft dry cloth alone since metal polish will damage protective finish.
- » Please allow 8-10 weeks for orders to be received. Some goods may have shorter despatch times. Please enquire with a sales consultant regarding each individual product.
- » Prices are for product only and based on customer pickups from our showroom. Should you require delivery this is a separate charge.
- » Please request our terms of trade for further information on our operations.

Tel: +61 2 9371 9976

Fax: +61 2 9328 2925

Email: [sales@lli.com.au](mailto:sales@lli.com.au)

Web: [www.lli.com.au](http://www.lli.com.au)

Address: Studio 5, 716 New South Head Road,  
Rose Bay NSW 2029, Australia

Showroom hours: Monday – Friday 9.00am – 5.30pm

# contacts