


# HOSPITALITY





□ Double diffuser – inner:  
opal polycarbonate, exterior:  
transparent borosilicate  
Direct light. Available in  
3 sizes. Direct light. Suitable  
for bathrooms (IP44).



**LLUE-05-2694-AH-37**

**LLUE-05-2695-AH-37**

**LLUE-05-2696-AH-37**

630MM-T5 24W FLUORESCENT INCLUDED

930MM-T5 38W FLUORESCENT INCLUDED

1230MM-T5 54W FLUORESCENT INCLUDED



class



□ WHITE ALABASTER

TOP:

**LLUE-05-2748-14-55**

6 X GX24Q-4 42W INCLUDED  
3 CE ELECTRONIC BALLAST INCLUDED  
IP 21, Ø 875MM X 161MM

BOTTOM:

**LLUE-05-2747-14-55**

1 X T5 TUBULAR 55W INCLUDED  
1 CE ELECTRONIC BALLAST INCLUDED  
IP 211, Ø 594MM X 102MM

# mirrors




□ CHROME & WHITE ALABASTER

TOP  
**LLUE-05-2745-14-55**  
2 X T5 28W HE +  
2 X T5 14W HE INCLUDED  
2 CE ELECTRONIC BALLAST INCLUDED IP44,  
W 710 X H 1010 X D 70.5MM

BOTTOM  
**LLUE-05-2746-21-55**  
4 X T5 28W HE INCLUDED  
2 CE ELECTRONIC BALLAST INCLUDED IP 44,  
W1010 X H 1010 X D 70.5MM

mirrors

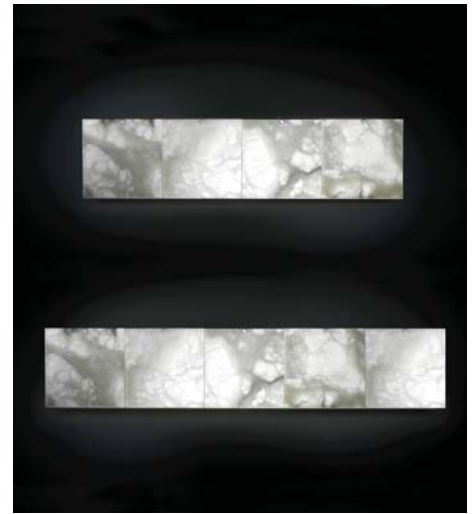

□ TOP:  
**LLUE-05-2735-21-55**  
L 1203 H 302 X D 105MM

BOTTOM:  
**LLUE-05-2736-21-55**  
L 1503 H 302 X D 105MM

1 X T5 28W HE INCLUDED  
1 CE ELECTRONIC BALLAST INCLUDED



# panels



□ SATIN NICKEL & WHITE ALABASTER

LEFT:

**LLUE-00-0367-81-55**

Ø230MM , SUSPENSION RANGE 330-1470MM

MIDDLE:

**LLUE-00-0138-81-55**

Ø280MM , SUSPENSION RANGE 380-1500MM

RIGHT:

**LLUE-00-0139-81-55**

Ø330MM , SUSPENSION RANGE 430-1555MM

**LLUE-00-01-40-81-55**

Ø380MM , SUSPENSION RANGE 480-1610MM

LAMP OPTIONS:

1 X E-27 PL ELEC 60W

1 X E-27 PL ELEC 11W



# pendants



□ SATIN NICKEL & WHITE ALABASTER  
**LLUE-20-0394-81-55**  
L 700 X H 700-900 X D 120MM  
LAMP OPTIONS:  
3XG24D-2 18 W



up & down

	All lighting fixtures bearing this symbol are suitable for installation on normally inflammable surfaces.		Manufactured according to the set safety and electromagnetism standards of Europe
	All lighting fixtures bearing this symbol are unsuitable for installation on normally inflammable surfaces.		Steel
	All light fittings bearing this symbol are Class I models. These light fittings have only basic isolation and therefore must be connected to the earthing system of the residential dwelling.		PVC
	All lighting fixtures bearing this symbol are of Class II. No metal part of Class II fixtures shall be connected to the ground connection of the home installation.		Ballast included
	This symbol indicates the minimum distance to be left between the focus of the lighting fixture and the lighted object.		Ballast needed, but not included.
	Resistance to incandescent wire at 850°C.		Fabric
	Registered models.		Optic glass
	Check availability.		Transformer included.
	Energy saving.		Transformer needed, but not included.
	All light fittings bearing this symbol are protected against water projections.		Zamak
IP 65	Dust-tight lamp, protected against water jets.		Electronic ballast included.
IP 20	Lamp protected against ingress of solid objects greater than 12mm.		PMMA
IP 68	Dust-tight lamp and protected against the effects of prolonged immersion in water and at depth.		Protection against electrical shocks includes other measures based on a very low voltage through a security transformer, without generating higher voltages
IP 54	Lamp protected against ingress of dust and against splashing water.		Class 1.
	Halo light direction.		Adjustable from 0° to 50° on the horizontal axis.
	Aluminum		Adjustable +180°/-15° on the horizontal axis.
			Adjustable from 0° to 350° on the vertical axis.
			Adjustable +/- 20° on the horizontal axis.



- » All products supplied by Limelight are sourced from third parties.
- » Limelight Illumination refers to their general terms of trade on all orders.
- » The description and dimensions of the items in this catalogue are indicative and may be modified for the purpose of technical or design improvements by the manufacturer.
- » The manufacturer of the listed products reserves the right to cancel or change all models without prior notice.
- » Do not use stronger bulbs than recommended and always clean lamps with a soft dry cloth alone since metal polish will damage protective finish.
- » Please allow 8-10 weeks for orders to be received. Some goods may have shorter despatch times. Please enquire with a sales consultant regarding each individual product.
- » Prices are for product only and based on customer pickups from our showroom. Should you require delivery this is a separate charge.
- » Please request our terms of trade for further information on our operations.

Tel: +61 2 9371 9976

Fax: +61 2 9328 2925

Email: [sales@lli.com.au](mailto:sales@lli.com.au)

Web: [www.lli.com.au](http://www.lli.com.au)

Address: Studio 5, 716 New South Head Road,  
Rose Bay NSW 2029, Australia

Showroom hours: Monday – Friday 9.00am – 5.30pm

# contacts