





INTERNAL
WALL LIGHTS



- Metal body available in 3 finishes: Ecobright, black lacquer or white lacquer. Indirect light.



LLUE-05-2782-AH-AH
LLUE-05-2782-05-05

05-2782-78-78
2 X G9 75W

HALOGEN OSRAM INCLUDED
AH ALUMINIUM ECOBRIGHT
05 BLACK LACQUERED
78 WHITE LACQUERED



escher



□ Metal body available in chrome or matte aluminium. Optical glass diffuser in lower part. Includes methacrylate trims in 3 interchangeable colours. Lighting diffused up and down.




LLUE-05-2397-21-E9
LLUE-05-2397-Y5-E9
R7S L-118 MAX 150W
HALOGEN OSRAM INCLUDED
CHROME OR MATT ALUMINUM
OPTIC GLASS



slim



□ Chrome metal body. Matte optical glass diffuser. Direct light.




LLUE-05-2574-21-B4
R7S L-118 MAX 150W
HALOGEN OSRAM INCLUDED
CHROME OPTIC GLASS









ciao



□ Satin nickel metal body.
Front optical glass diffuser
and polycarbonate perimeter.
Available in 2 sizes, both in square
and circular versions. Direct and
indirect light.



LLUE-EP-0344-N3-XY
RECESSED MOUNTING ASYMMETRIC LUMI-
NAIRE FOR TC-TEL OR QT-DE LAMP.
TC-TEL GX24Q-3
230C 1X26W

    IP20
 

wall



LLUE-EP-0346-N3-XY
RECESSED MOUNTING ASYMMETRIC
LUMINAIRE FOR TC-DEL LAMP.
TC-DEL G24Q-2 230 1X18W
DIMENSIONS 215 X 345 X 100 MM WITH BOX



LLUE-EP-0347-N3-00
RECESSED MOUNTING ASYMMETRIC
LUMINAIRE FOR T5 FLUORESCENT LAMP 24W.
TL5 G5 230 MAX.24W
DIMENSIONS 589 X 109 MM WITH BOX



LLUE-EP-0349-N3-XY
HALOPIN G9 230V 25W
POWER LED (5500-6000K) 1,2W
DIMENSIONS WITH BOX 80X116X62MM
DIMENSIONS WITHOUT BOX 77X116MM


CE V  IP 20

RF850°C  0,2m

sign



□ Recessed Linear Wall light.
Dimmable and non dimmable
options available.

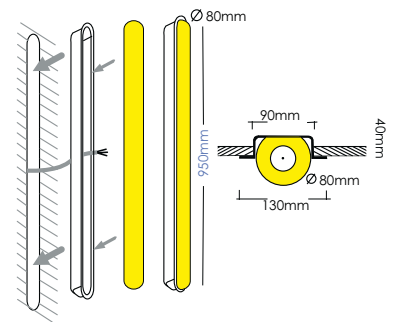

LLLS-DOX-323.25.39


T5 21/29W 230V

IP20 POLYCARBONATE & CHROME



tube

recessed

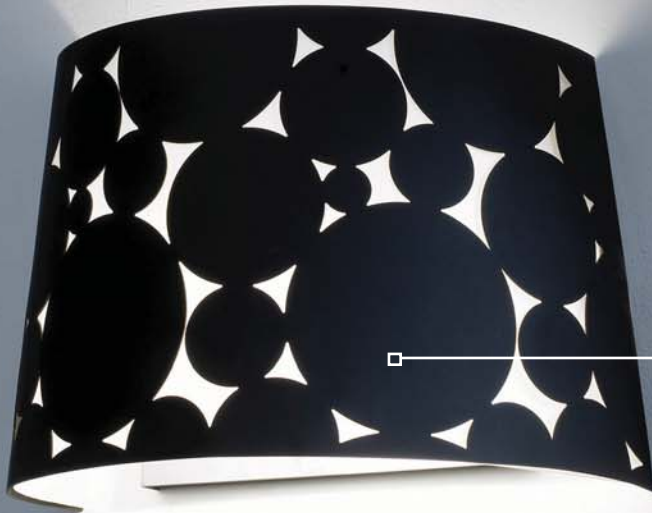

□ Surface mounted wall shade with up and down light direction. Acrylic diffuser. Powder coated frame available in white or black.

LLUE-05-4343-05-05

LLUE-05-4343-14-14

2XPL ELEC E-27 MAX 18W

2 X E-27 / MAX 60W

BLACK WHITE

H190 X D161 X W285MM



trama



□ A series of minimalist led light-fittings executed in polished aluminium with a transparent joint to create an effect of a luminous ring. An innovative family boasting spectacular, concentrated light.

LLUE-05-3377-S2-00

LED 1-3W (50 X 49 X 40MM) COLD

LLUE-05-3378-S2-00

LED 1-3W (50 X 49 X 40MM) WARM

LLUE-05-3381-S2-00


LED 2-6W (66 X 49 X 40MM) COLD

LLUE-05-3382-S2-00


LED 2-6W (66 X 49 X 40MM) WARM



yeday

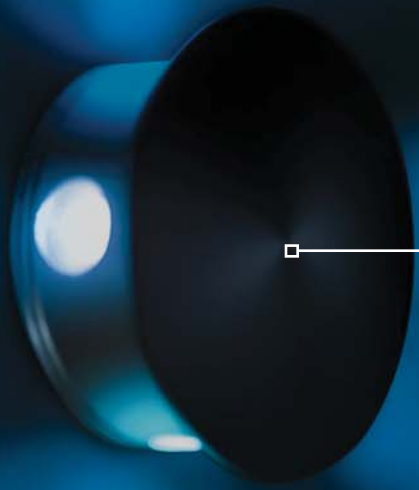

□ A decorative surface led light fitting with an aluminium body. It projects 4 luminous perpendicular beams, creating a grid effect onto the wall, which makes it ideal for contemporary and modern environments

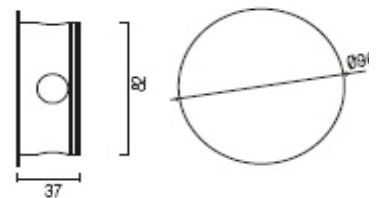

LLUE-05-3391-N3-00
LED 4W (Ø96 X 37 X 82) BLUE

LLUE-05-3397-N3-00
LED 4W (Ø96 X 37 X 82) NATURAL



star



All lighting fixtures bearing this symbol are suitable for installation on normally inflammable surfaces.



All lighting fixtures bearing this symbol are unsuitable for installation on normally inflammable surfaces.



All light fittings bearing this symbol are Class I models. These light fittings have only basic isolation and therefore must be connected to the earthing system of the residential dwelling.



All lighting fixtures bearing this symbol are of Class II. No metal part of Class II fixtures shall be connected to the ground connection of the home installation.



This symbol indicates the minimum distance to be left between the focus of the lighting fixture and the lighted object.



Resistance to incandescent wire at 850°C.



Registered models.



Check availability.



Energy saving.



IP 44

All light fittings bearing this symbol are protected against water projections.

IP 65

Dust-tight lamp, protected against water jets.

IP 20


Lamp protected against ingress of solid objects greater than 12mm.

IP 68

Dust-tight lamp and protected against the effects of prolonged immersion in water and at depth.

IP 54

Lamp protected against ingress of dust and against splashing water.



Halo light direction.



Aluminum



Manufactured according to the set safety and electromagnetism standards of Europe



Steel



PVC



Ballast included



Ballast needed, but not included.



Fabric



Optic glass



Transformer included.



Transformer needed, but not included.



Zamak



Electronic ballast included.



PMMA



Protection against electrical shocks includes other measures based on a very low voltage through a security transformer, without generating higher voltages



Class 1.



Adjustable from 0° to 50° on the horizontal axis.



Adjustable +180°/-15° on the horizontal axis.



Adjustable from 0° to 350° on the vertical axis.



Adjustable +/- 20° on the horizontal axis.



- » All products supplied by Limelight are sourced from third parties.
- » Limelight Illumination refers to their general terms of trade on all orders.
- » The description and dimensions of the items in this catalogue are indicative and may be modified for the purpose of technical or design improvements by the manufacturer.
- » The manufacturer of the listed products reserves the right to cancel or change all models without prior notice.
- » Do not use stronger bulbs than recommended and always clean lamps with a soft dry cloth alone since metal polish will damage protective finish.
- » Please allow 8-10 weeks for orders to be received. Some goods may have shorter despatch times. Please enquire with a sales consultant regarding each individual product.
- » Prices are for product only and based on customer pickups from our showroom. Should you require delivery this is a separate charge.
- » Please request our terms of trade for further information on our operations.

Tel: +61 2 9371 9976

Fax: +61 2 9328 2925

Email: sales@lli.com.au

Web: www.lli.com.au

Address: Studio 5, 716 New South Head Road,
Rose Bay NSW 2029, Australia

Showroom hours: Monday – Friday 9.00am – 5.30pm

contacts